
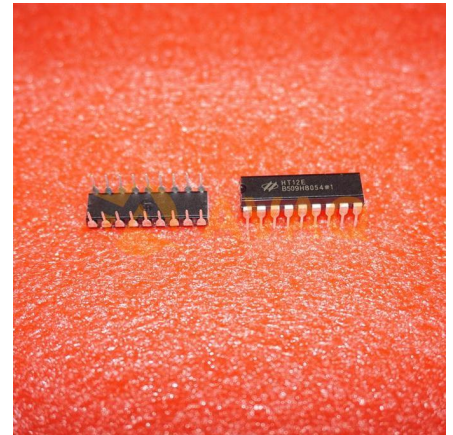


Encoder 3V for Remote Control System Application

| | |
|----------------------|--|
| Manufacturer: | <u>Holtek Semiconductor Inc</u> |
| Package/Case: | SOP20 |
| Product Type: | Communication & Networking ICs |
| RoHS: | RoHS Compliant/Lead free  |
| Lifecycle: | Active |



Images are for reference only

[Inquiry](#)

General Description

Key Features

- Operating voltage range from 2.4V to 12V
- Low power and high noise immunity CMOS technology
- Low standby current of typically 0.1A at VDD=5V
- Minimum transmission word (4 words)
- Built-in oscillator needs only 5% resistor
- Data code has positive polarity
- Pair with Holtek's 2[^]12 series of decoders
- Operating temperature range from -20°C to 75°C

